


TEC2-198xx6262  
www.kjlp.net


(H)±0.1  
The H is for reference only. Please be subject to the actual products.

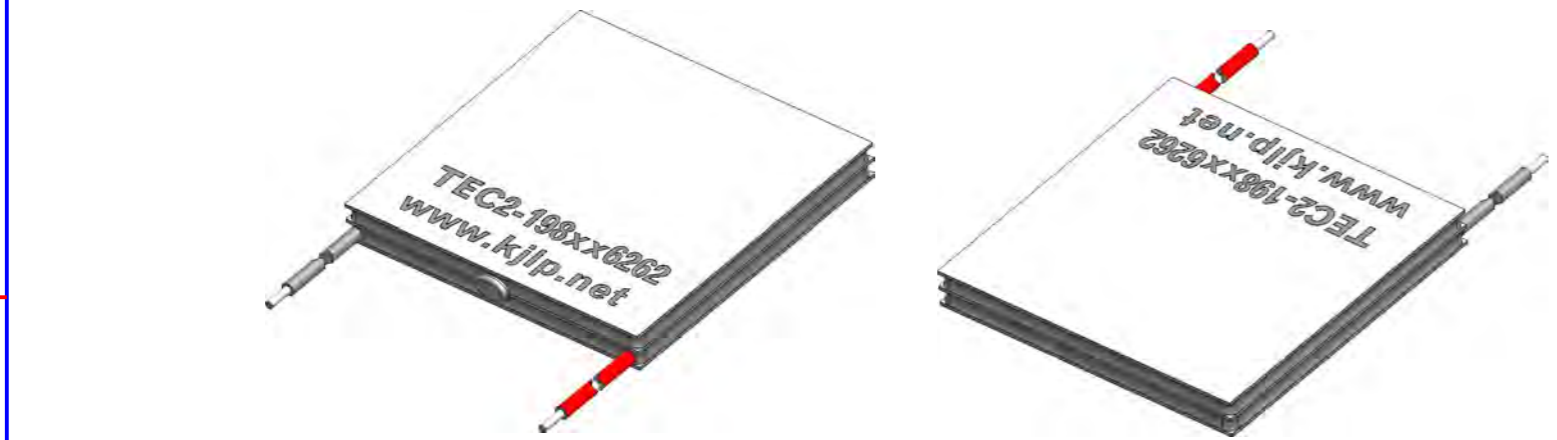

\*DO NOT SCALE DRAWING 比例 0,800 比例 0,800

REVISIONS					
REV.	POS.	DESCRIPTION	DATE	DRW	APP
A		INITIAL CREATION	2013/01/01	Gory	Mason

Curve Chart(Be Confined To TEC2-198126262):

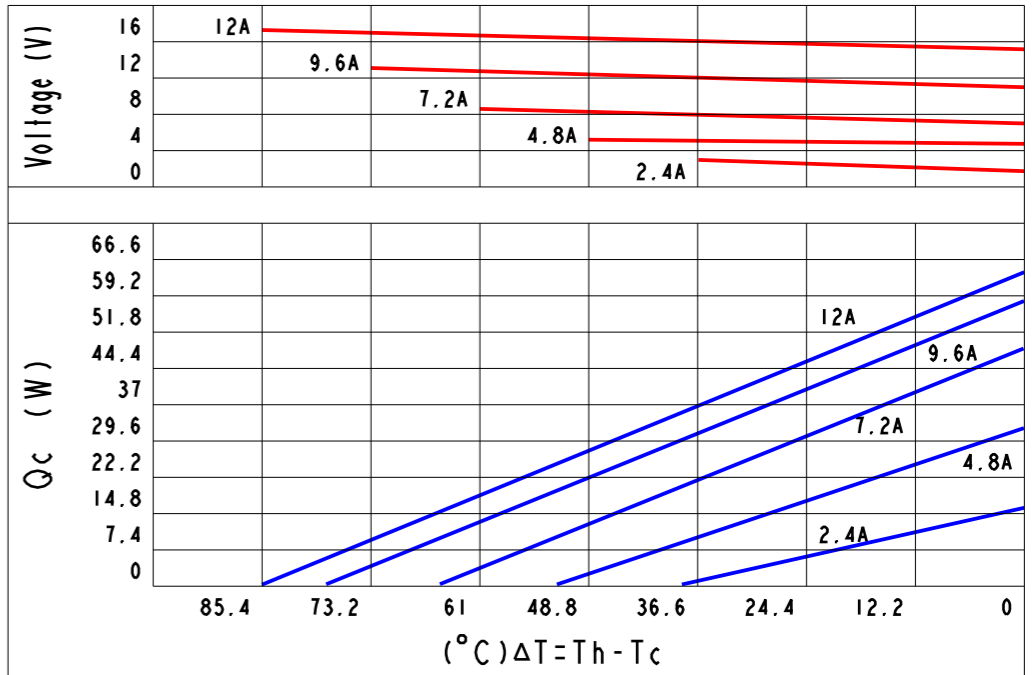

Part Number And Feature:

T	E	C	2	-	1	9	8	x	x	6	2	6	2	Sealing	YES
↓	↓				↓	↓	↓	↓	↓	↓	↓	↓	↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES

Technical Data:

ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TEC2-198096262	198	9 A	16 V	56W 85°C	62	62	RF8.8
2	TEC2-198126262	198	12 A	16 V	66W 85°C	62	62	RF8.8

Notes:

1. Printing always on cold side.
2. Tolerance of thermo and electric parameters ±10%.
3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.)

<p>1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MM</p> <p>2 TOLERANCE ARE AS FOLLOWS:</p> <p>0 &lt; X &lt; 2 ± 0.06</p> <p>2 &lt; X &lt; 10 ± 0.08</p> <p>10 &lt; X &lt; 50 ± 0.12</p> <p>50 &lt; X &lt; 100 ± 0.16</p> <p>100 &lt; X &lt; 200 ± 0.20</p> <p>200 &lt; X &lt; 300 ± 0.30</p> <p>ANGLES ± 0.5°</p>	PART NO.	TEC2-198xx6262	DESCRIPTION	DC 16V(Max.),9~12A(Max.),198 P&N,62*62mm					
	SIGNATURE		DATE	<p>昆晶冷片(深圳)电子有限公司 KJLP(SHENZHEN)ELECTRONICS CO., LTD email: kjlpkjlp@gmail.com http://www.kjlp.net Tel: +86-755-82528352 Fax: +86-755-22639899</p>					
	DRAWN BY	Gory	2013/01/01						
	CHECKED BY	Justin	2013/01/01						
ENGR	Vivi	2013/01/01							
APPROVED BY	Mason	2013/01/01	CAD MODLE:	TEC2-198xx6262.prt	SCALE:	1:1	REV:	A	
MATERIAL:	ISSUED BY	Jack	2013/01/01	CAD DWG:	TEC2-198xx6262.drw	SIZE:	A3	SHEET:	1 OF 1