



REVISIONS						
REV.	POS.	DESCRIPTION	DATE	DRW	APP	ECR#
A		INITIAL CREATION	2013/09/09	Gary	Mason	

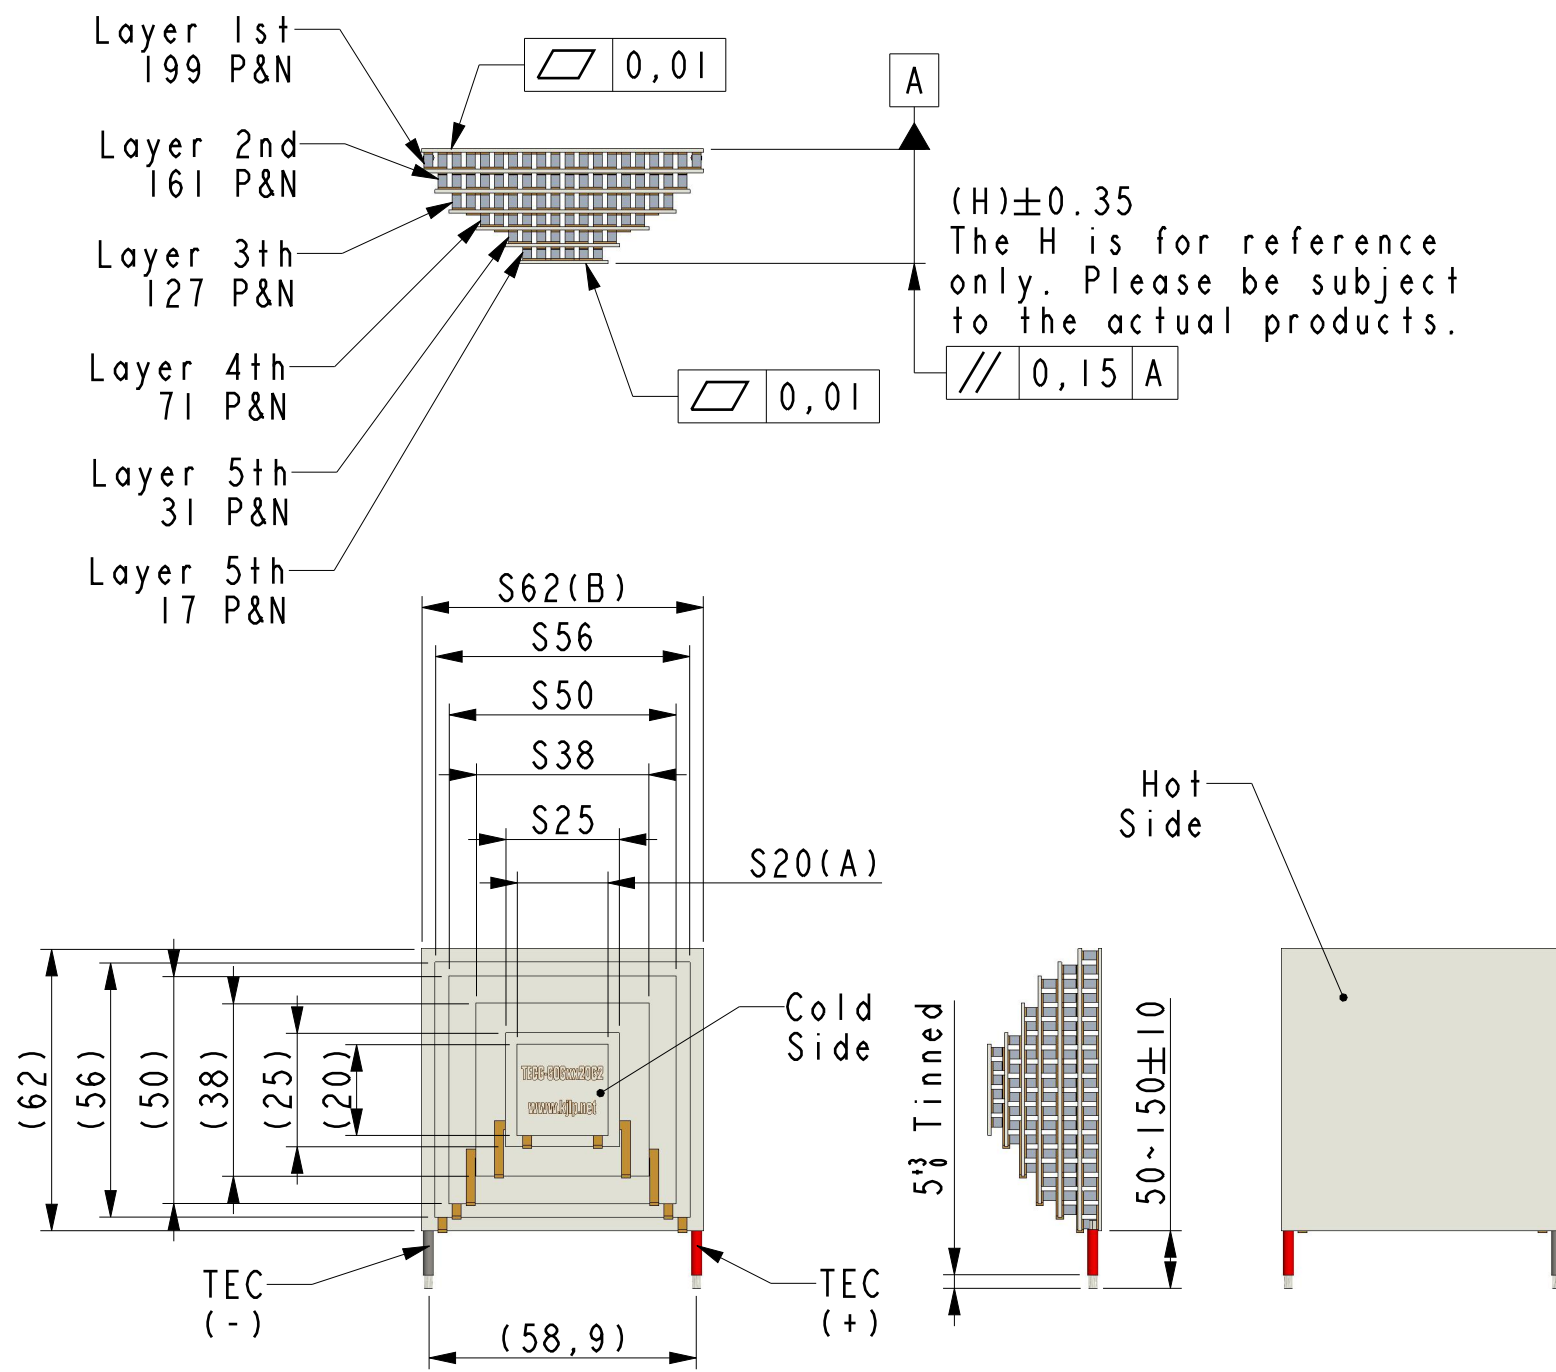

Curve Chart(Be Confined To TEC6-606062062):

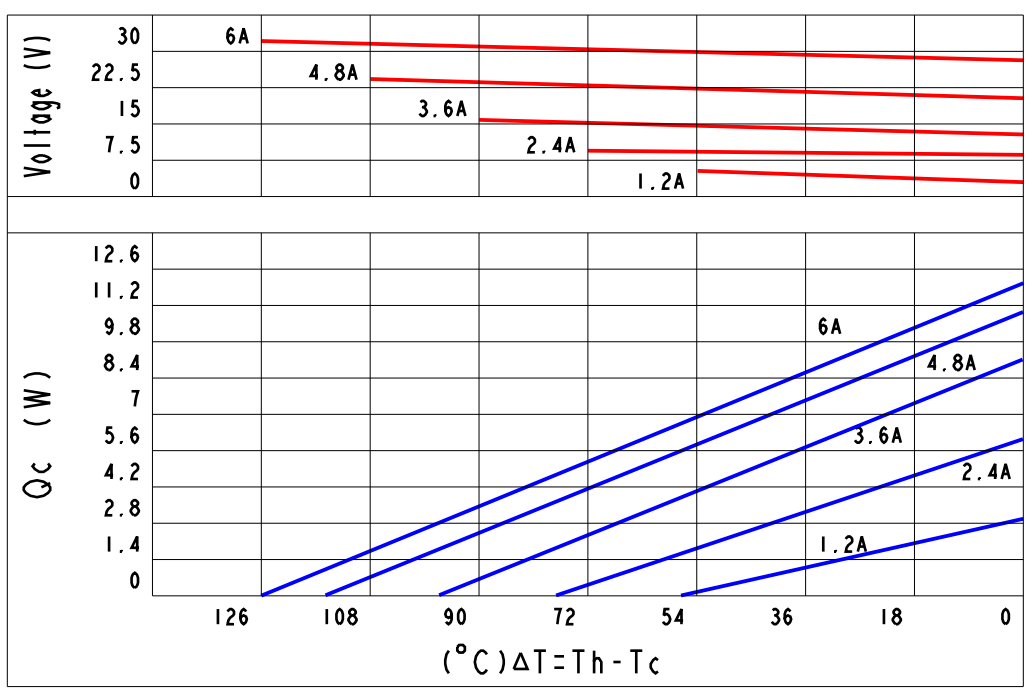

Part Number And Feature:


T	E	C	6	-	6	0	6	x	x	2	0	6	2	Sealing	NO
↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES

Technical Data:

ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TEC6-606062062	606	6 A	30 V	12W	125°C	S20	S62 RF23


Notes:

1. Printing always on cold side.
2. Torlerance of thermo and electric parameters ±10%.
3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.)

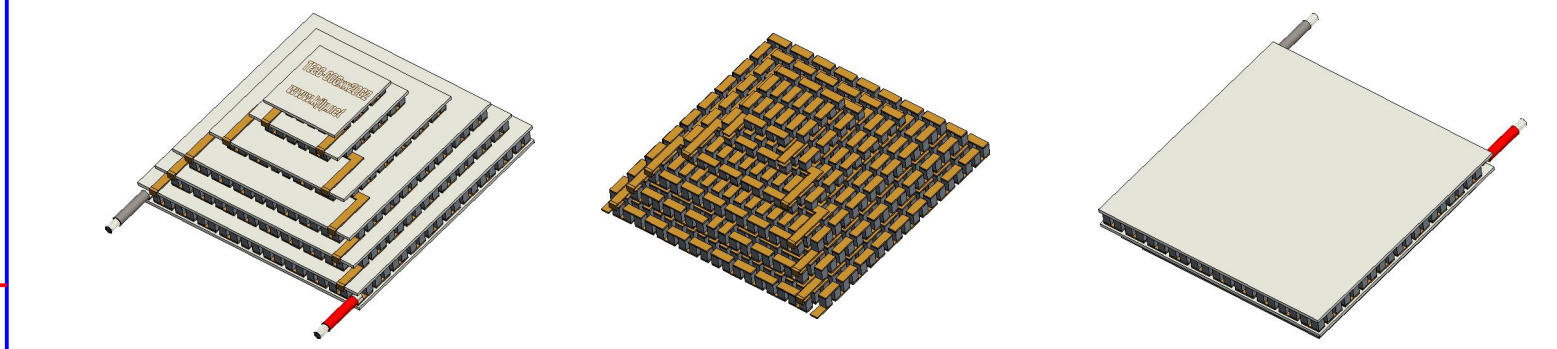


*DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE
 USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS
 CO., LTD.

1. UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE MM
 2 TOLERANCE ARE AS FOLLOWS:
 0 < X < 2 ± 0.06
 2 < X < 10 ± 0.08
 10 < X < 50 ± 0.12
 50 < X < 100 ± 0.16
 100 < X < 200 ± 0.20
 200 < X < 300 ± 0.30
 ANGLES ± 0.5°

PART No.	TEC6-606xx2062	DESCRIPTION	DC 30V(Max.),6A(Max.),606 P&N,S20#S62mm
SIGNATURE	DATE	 昆晶冷片(深圳)电子有限公司 KJLP(SHENZHEN)ELECTRONICS CO., LTD email: kjlp@kjlp.net http://www.kjlp.net Tel: +86-755-82528352 Fax: +86-755-22639899	
DRAWN BY	Gary	2013/09/09	
CHECKED BY	Justin	2013/09/09	
ENGR	Vivi	2013/09/09	
APPROVED BY	Mason	2013/09/09	
ISSUED BY	Jack	2013/09/09	
MATERIAL:		CAD MODLE:	TEC6-606xx2062.prt
		CAD DWG:	TEC6-606xx2062.drw
		SCALE:	1:1
		REV:	A
		SIZE:	A3
		SHEET:	1 OF 1