


- Notes:
1. Printing always on cold side.
  2. Torlerance of thermo and electric parameters  $\pm 10\%$ .
  3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
  4. Please contact with us if you need Melting Point  $183^{\circ}\text{C}$  (Operation Temperature  $150^{\circ}\text{C}$  Max.) and  $235^{\circ}\text{C}$  (Operation Temperature  $200^{\circ}\text{C}$  Max.) type.


\*DO NOT SCALE DRAWING



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE  
USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS  
CO., LTD.

REVISIONS					
REV.	POS.	DESCRIPTION	DATE	DRW	APP
A		INITIAL CREATION	2013/01/01	Gory	Mason

Curve Chart(Be Confined To TE01-044031525):

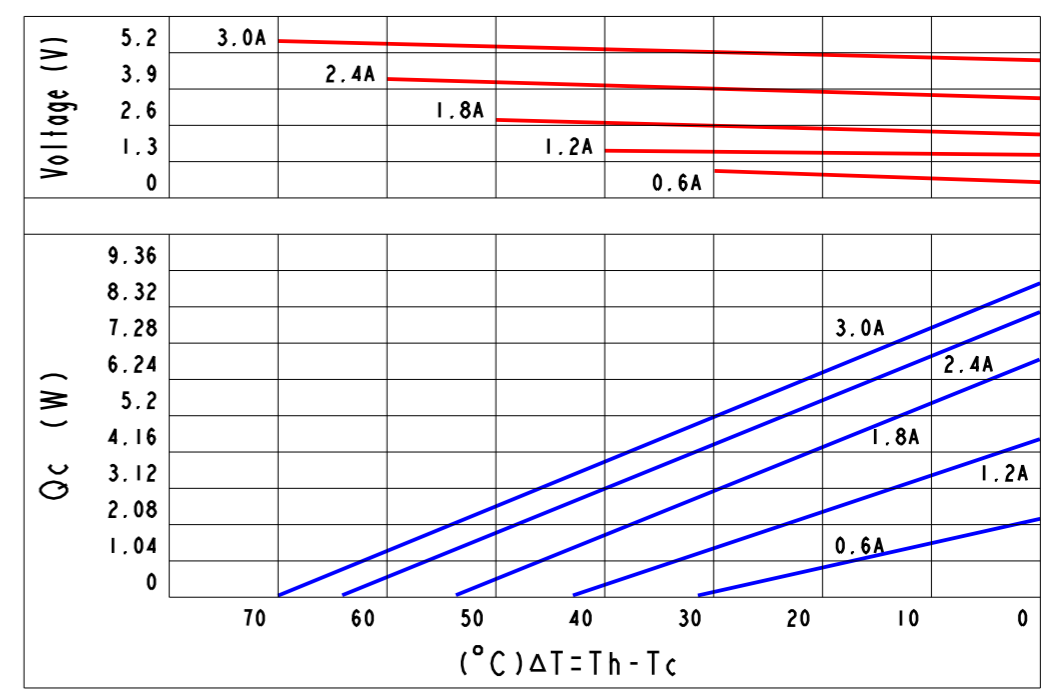

Part Number And Feature:


T	E	O	I	-	0	4	4	x	x	1	5	2	5	Sealing	YES
↓	↓				↓	↓	↓	↓	↓	↓	↓	↓	↓	Operation Temperature	$125^{\circ}\text{C}$ (Max.)
Thermo	Electric	Chip(O Type)	Stage	P	N	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	$138^{\circ}\text{C}$
														Storage Temperature	$-60^{\circ}\text{C}\sim 100^{\circ}\text{C}$
														RoHS	YES

Technical Data:

ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TE01-044031525	44	3 A	5.2 V	9.3W	$70^{\circ}\text{C}$	$\varnothing 15$	$\varnothing 25$ RF3.1

1. UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE MM  
2 TOLERANCE ARE AS FOLLOWS:  
0 < X < 2 ± 0.06  
2 < X < 10 ± 0.08  
10 < X < 50 ± 0.12  
50 < X < 100 ± 0.16  
100 < X < 200 ± 0.20  
200 < X < 300 ± 0.30  
ANGLES ± 0.5°

PART NO.	TE01-044xx1525	DESCRIPTION	DC 5.2V(Max.), 3A(Max.), 44 P&N, $\varnothing 15\ast\varnothing 25\text{mm}$
SIGNATURE		DATE	
DRAWN BY	Gory	2013/01/01	
CHECKED BY	Justin	2013/01/01	
ENGR	Vivi	2013/01/01	
APPROVED BY	Mason	2013/01/01	CAD MODLE: TE01-044xx1525.prt
ISSUED BY	Jack	2013/01/01	CAD DWG: TE01-044xx1525.drw

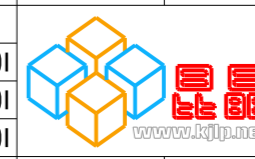

昆晶冷片(深圳)电子有限公司  
KJLP (SHENZHEN) ELECTRONICS CO., LTD  
email: kjlp@kjlp.net http://www.kjlp.net  
Tel: +86-755-82528352 Fax: +86-755-22639899

MATERIAL:		SCALE: 1:1	REV: A
		SIZE: A3	SHEET: 1 OF 1