


Curve Chart(Be Confined To TEC2-156104040):

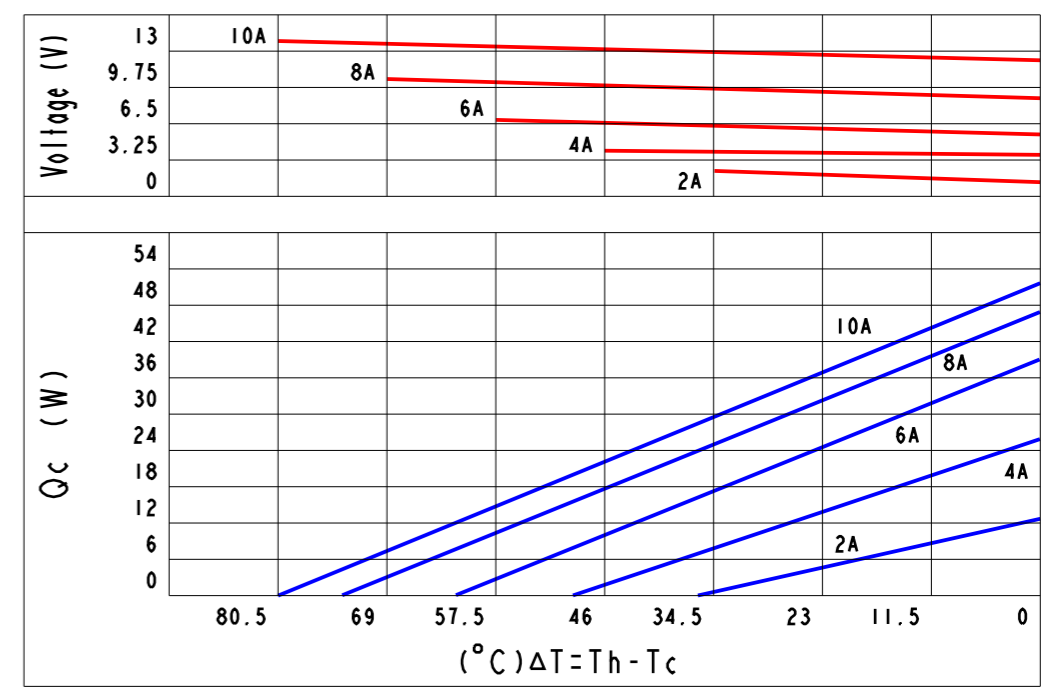

Part Number And Feature:

T	E	C	2	-	1	5	6	x	x	4	0	4	0	Sealing	YES
↓	↓				↓			↓		↓			↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES

Technical Data:

ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)	
1	TEC2-156044040	156	4 A	13 V	33W	80°C	40	40	RF8.6
2	TEC2-156054040	156	5 A	13 V	37W	80°C	40	40	RF8.2
3	TEC2-156064040	156	6 A	13 V	41W	80°C	40	40	RF7.8
4	TEC2-156084040	156	8 A	13 V	47W	80°C	40	40	RF7.7
5	TEC2-156104040	156	10 A	13 V	54W	80°C	40	40	RF7.6

- Notes:
1. Printing always on cold side.
 2. Torlerance of thermo and electric parameters ±10%.
 3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
 4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.).

*DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION
 THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE
 USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS
 CO., LTD.

1. UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE MM
 2 TOLERANCE ARE AS FOLLOWS:
 0 < X < 2 ± 0.06
 2 < X < 10 ± 0.08
 10 < X < 50 ± 0.12
 50 < X < 100 ± 0.16
 100 < X < 200 ± 0.20
 200 < X < 300 ± 0.30
 ANGLES ± 0.5°

PART No.	TEC2-156xx4040	DESCRIPTION	DC 13V(Max.),4~10A(Max.),156 P&N,40*40mm						
SIGNATURE	DATE	昆晶冷片(深圳)电子有限公司 KJLP(SHENZHEN)ELECTRONICS CO., LTD email: kjlp@kjlp.net http:// www.kjlp.net Tel: +86-755-82528352 Fax: +86-755-22639899							
DRAWN BY	Gary					2013/09/09			
CHECKED BY	Justin					2013/09/09			
ENGR	Vivi					2013/09/09			
APPROVED BY	Mason					2013/09/09			
MATERIAL:	ISSUED BY	Jack	2013/09/09	CAD MODLE:	TEC2-156xx4040.prt	SCALE:	1:1	REV:	A
				CAD DWG:	TEC2-156xx4040.drw	SIZE:	A3	SHEET:	1 OF 1