


Curve Chart(Be Confined To TE01-017020313):

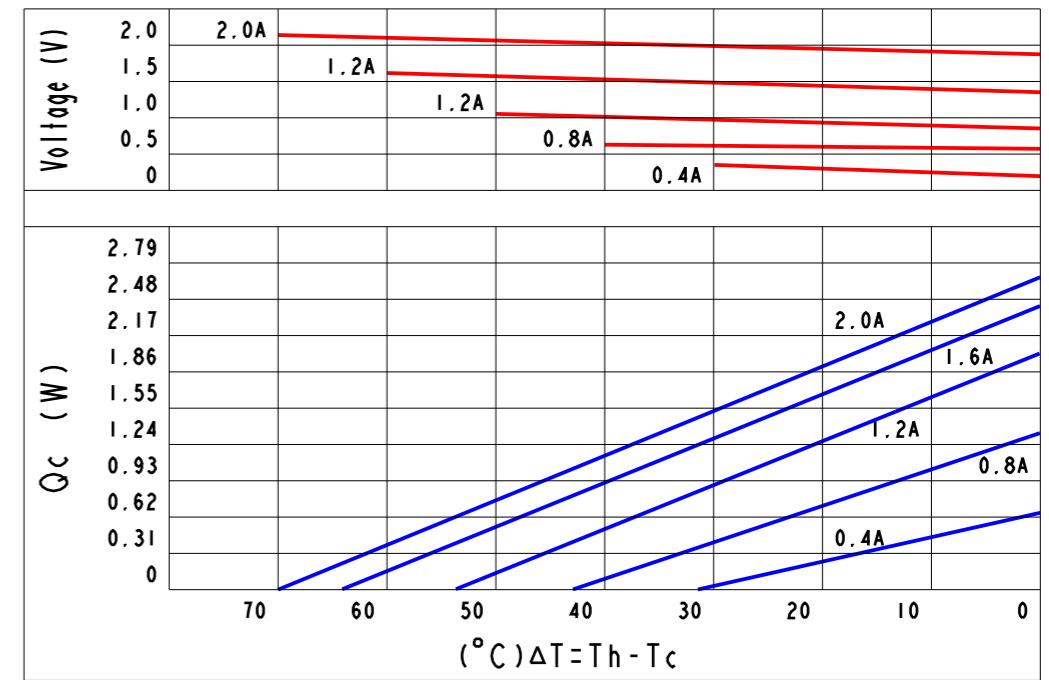

Part Number And Feature:

T	E	O	I	-	0	1	7	x	x	0	3	1	3	Sealing	YES
↓	↓				↓	↓	↓	↓	↓	↓	↓	↓	↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip(O Type)	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES

Technical Data:


ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TE01-017010313	17	1.5 A	2 V	1.9W	70°C	∅3	∅13 RF4.0
2	TE01-017020313	17	2 A	2 V	2.8W	70°C	∅3	∅13 RF3.9

Notes:

1. Printing always on cold side.
2. Tolerance of thermo and electric parameters ±10%.
3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.) and 235°C (Operation Temperature 200°C Max.) type.

*DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPR ODUCE
USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS
CO., LTD.

1. UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE MM
2. TOLERANCE ARE AS FOLLOWS:
0 < X < 2 ± 0.06
2 < X < 10 ± 0.08
10 < X < 50 ± 0.12
50 < X < 100 ± 0.16
100 < X < 200 ± 0.20
200 < X < 300 ± 0.30
ANGLES ± 0.5°

MATERIAL:

PART No. TE01-017xx0313 DESCRIPTION DC 2V(Max.), 3A(Max.), 17 P&N, ∅3*∅13mm

SIGNATURE DATE
DRAWN BY Gary 2013/09/09
CHECKED BY Justin 2013/09/09
ENGR Vivi 2013/09/09
APPROVED BY Mason 2013/09/09
ISSUED BY Jack 2013/09/09



昆晶冷片(深圳)电子有限公司
KJLP (SHENZHEN) ELECTRONICS CO., LTD
email: kjlp@kjlp.net http://www.kjlp.net
Tel: +86-755-82528352 Fax: +86-755-22639899

CAD MODLE: TE01-017xx0313.prt SCALE: 1:1 REV: A
CAD DWG: TE01-017xx0313.dwg SIZE: A3 SHEET: 1 OF 1